

ADKING **CATÁLOGO 2023**



- ARGOS AX5

-1



STABILITY



BRAKING



SNOW&ICE



Pattern Description

The sharp lateral grooves and the sipe design can enhance tire hydroplaning performance

Optimized 5 ratio pitches, reduce block resonance noise and road noise to improve ride comfort and overall driving pleasure

Continuous solid center ribs can improve driving stability at high speeds and excellent steering response

Optimized Avoid ration and footprint, balance the tread block stiffness, prevent the uneven wear, to improve the tire wear performance



NO.	SIZE	LVS	Section Width		Overall Dia		Tread Depth		RIM	Max. Load		Max. Pressure		UTQG	(EU) 2020/740				
			mm	inch	mm	inch	mm	32nds		kg	lbs	kPa	psi		R	W	LV		
1	145/70R12	49T	150	5.9	509	20.0	6.6	8.3	4.5B	325	716	716	44	400 A A	0	0	0	0	
2	145/70R13	71T	150	5.9	534	21.0	6.6	8.3	4.5B	345	761	761	44	400 A A	0	0	0	0	
3	145/80R12	74T	145	5.7	537	21.1	6.6	8.3	4B	375	827	827	44	400 A A	0	0	0	0	
4	145/80R13	75T	145	5.7	562	22.1	6.6	8.3	4B	387	853	853	44	400 A A	0	0	0	0	
5	155/60R15	74T	157	6.2	567	22.3	7	8.8	4.5B	375	827	827	44	400 A A	0	0	0	0	
6	155/65R13	73T	157	6.2	532	20.9	6.6	8.3	4.5B	365	805	805	44	400 A A	0	0	0	0	
7	155/65R14	75T	157	6.2	558	22.0	7	8.8	4.5B	387	853	853	44	400 A A	0	0	0	0	
8	155/70R12	73T	157	6.2	523	20.6	6.6	8.3	4.5B	365	805	805	44	400 A A	0	0	0	0	
9	155/70R13	75T	157	6.2	548	21.4	6.6	8.3	4.5B	387	853	853	44	400 A A	0	0	0	0	
10	155/70R14	77T	157	6.2	574	22.6	7	8.8	4.5B	412	908	908	44	400 A A	0	0	0	0	
11	155/80R12	77T	157	6.2	553	21.8	6.6	8.3	4.5B	412	908	908	44	400 A A	0	0	0	0	
12	155/80R13	79T	157	6.2	578	22.8	6.6	8.3	4.5B	437	963	963	44	400 A A	0	0	0	0	
13	165/60R14	75H	170	6.7	554	21.8	7	8.8	5J	387	853	853	44	400 A A	0	0	0	0	
14	165/60R15	81T	XL	170	6.7	579	22.8	7	8.8	5J	462	1019	1019	50	400 A A	0	0	0	0
15	165/65R13	77T	170	6.7	544	21.4	6.6	8.3	5J	412	908	908	44	400 A A	0	0	0	0	
16	165/65R14	79T	170	6.7	569	22.4	7	8.8	5J	437	963	963	44	400 A A	0	0	0	0	
17	165/65R15	81T	170	6.7	595	23.4	7	8.8	5J	462	1019	1019	44	400 A A	0	0	0	0	
18	165/70R12	77T	170	6.7	537	21.1	6.6	8.3	5B	412	908	908	44	400 A A	0	0	0	0	
19	165/70R13	79T	170	6.7	562	22.1	6.6	8.3	5J	437	963	963	44	400 A A	0	0	0	0	
20	165/70R14	81T	170	6.7	588	23.1	7	8.8	5J	462	1019	1019	44	400 A A	0	0	0	0	
21	165/70R14	85T	XL	170	6.7	588	23.1	7	8.8	5J	515	1135	1135	50	400 A A	0	0	0	0
22	165/80R13	83T	165	6.5	594	23.4	6.6	8.3	4.5B	487	1074	1074	44	400 A A	0	0	0	0	
23	175/50R16	77V	182	7.2	582	22.9	7	8.8	5.5J	412	908	908	44	400 A A	0	0	0	0	
24	175/55R15	77T	182	7.2	573	22.6	7	8.8	5.5J	412	908	908	44	400 A A	0	0	0	0	
25	175/60R13	77H	177	7.0	540	21.3	6.6	8.3	5J	412	908	908	44	400 A A	0	0	0	0	
26	175/60R14	79H	177	7.0	566	22.3	7	8.8	5J	437	963	963	44	400 A A	0	0	0	0	
27	175/60R15	81V	177	7.0	591	23.3	7	8.8	5J	462	1019	1019	44	400 A A	0	0	0	0	
28	175/65R13	80T	177	7.0	558	22.0	6.6	8.3	5J	450	992	992	44	400 A A	0	0	0	0	
29	175/65R14	80H	177	7.0	584	23.0	7.5	9.4	5J	475	1067	1067	44	400 A A	0	0	0	0	
30	175/65R14	86T	XL	177	7.0	584	23.0	7.5	9.4	5J	530	1168	1168	50	400 A A	0	0	0	0
31	175/65R15	86H	177	7.0	609	24.0	7	8.8	5J	500	1102	1102	44	400 A A	0	0	0	0	
32	175/70R12	80T	177	7.0	551	21.7	6.6	8.3	5B	450	992	992	44	400 A A	0	0	0	0	
33	175/70R13	82T	177	7.0	576	22.7	6.6	8.3	5J	475	1067	1067	44	400 A A	0	0	0	0	
34	175/70R14	84T	177	7.0	602	23.7	6.6	8.3	5J	500	1102	1102	44	400 A A	0	0	0	0	
35	175/70R14	88T	XL	177	7.0	602	23.7	6.6	8.3	5J	560	1235	1235	50	400 A A	0	0	0	0
36	185/50R14	77V	194	7.6	542	21.3	7	8.8	6J	412	908	908	44	400 A A	0	0	0	0	
37	185/50R16	81V	194	7.6	592	23.3	7	8.8	6J	462	1019	1019	44	400 A A	0	0	0	0	
38	185/55R14	80H	194	7.6	560	22.0	7	8.8	6J	450	992	992	44	400 A A	0	0	0	0	
39	185/55R15	82V	194	7.6	585	23.0	7	8.8	6J	475	1067	1067	44	400 A A	0	0	0	0	
40	185/55R16	83V	194	7.6	610	24.0	7	8.8	6J	487	1074	1074	44	400 A A	0	0	0	0	

- ARGOS AX5 -2

NO.	SIZE	LVS	Section Width		Overall Dia		Tread Depth		RIM	Max. Load		Max. Pressure		UTOG	[EU] 2020/740			
			mmj	inch	mmj	inch	mmj	32nds		kgs	lbs	kPa	psi		R	W	LV	
41	195/55R14	87V	XL	194	7.6	410	24.0	7	8.8	4.1	545	1201	1201	50	400 A	0	0	0
42	195/60R14	83H		189	7.4	378	22.8	7	8.8	5.5J	475	1047	1047	44	400 A	0	0	0
43	195/60R15	88H	XL	189	7.4	402	23.7	6.6	8.3	5.5J	500	1102	1102	50	400 A	0	0	0
44	195/60R15	86H		189	7.4	402	23.7	6.6	8.3	5.5J	500	1102	1102	44	400 A	0	0	0
45	195/60R14	86H		189	7.4	394	23.5	7	8.8	5.5J	500	1102	1102	44	400 A	0	0	0
46	195/55R15	88H		189	7.4	421	24.4	6.6	8.3	5.5J	540	1225	1225	44	400 A	0	0	0
47	195/55R15	92H	XL	189	7.4	421	24.4	6.6	8.3	5.5J	630	1389	1389	50	400 A	0	0	0
48	195/70R13	86T		189	7.4	390	23.2	6.6	8.3	5.5J	520	1149	1149	44	400 A	0	0	0
49	195/70R14	88T		189	7.4	416	24.3	7	8.8	5.5J	540	1225	1225	44	400 A	0	0	0
50	195/50R15	82V		201	7.9	377	22.7	7	8.8	6J	475	1047	1047	31	400 A	0	0	0
51	195/50R16	84V		201	7.9	402	23.7	7	8.8	6J	500	1102	1102	31	400 A	0	0	0
52	195/50R16	88V	XL	201	7.9	402	23.7	7	8.8	6J	540	1225	1225	30	400 A	0	0	0
53	195/50R15	85V		201	7.9	395	23.4	7	8.8	6J	515	1135	1135	31	400 A	0	0	0
54	195/50R16	87V		201	7.9	420	24.4	7	8.8	6J	545	1201	1201	31	400 A	0	0	0
55	195/55R14	91V	XL	201	7.9	420	24.4	7	8.8	6J	615	1354	1354	30	400 A	0	0	0
56	195/60R14	84H		201	7.9	390	23.2	7	8.8	6J	530	1168	1168	44	400 A	0	0	0
57	195/60R15	88H		201	7.9	415	24.2	6.6	8.3	6J	540	1225	1225	44	400 A	0	0	0
58	195/60R15	88V		201	7.9	415	24.2	6.6	8.3	6J	540	1225	1225	44	400 A	0	0	0
59	195/60R16	89H		201	7.9	440	25.2	7	8.8	6J	580	1279	1279	44	400 A	0	0	0
60	195/60R14	89H		201	7.9	410	24.0	7	8.8	6J	580	1279	1279	44	400 A	0	0	0
61	195/65R15	91V		201	7.9	435	25.0	6.6	8.3	6J	615	1354	1354	44	400 A	0	0	0
62	195/65R15	95H	XL	201	7.9	435	25.0	6.6	8.3	6J	690	1521	1521	50	400 A	0	0	0
63	195/70R14	91T		201	7.9	430	24.8	7	8.8	6J	615	1356	1356	44	400 A	0	0	0
64	195/70R14	95T	XL	201	7.9	430	24.8	7	8.8	6J	690	1521	1521	50	400 A	0	0	0
65	205/50R16	87W		214	8.4	412	24.1	7	8.8	6.5J	545	1201	1201	31	400 A	0	0	0
66	205/50R16	87V		214	8.4	412	24.1	7	8.8	6.5J	545	1201	1201	31	400 A	0	0	0
67	205/50R14	91V		214	8.4	432	24.9	6.6	8.3	6.5J	615	1354	1354	31	400 A	0	0	0
68	205/55R16	91W		214	8.4	432	24.9	6.6	8.3	6.5J	615	1354	1354	31	400 A	0	0	0
69	205/60R14	88H		209	8.2	402	23.7	7	8.8	6J	540	1225	1225	44	400 A	0	0	0
70	205/60R15	91V		209	8.2	427	24.7	7	8.8	6J	615	1356	1356	31	400 A	0	0	0
71	205/60R16	92V		209	8.2	452	25.7	6.6	8.3	6J	630	1389	1389	31	400 A	0	0	0
72	205/60R14	94V	XL	209	8.2	452	25.7	6.6	8.3	6J	710	1545	1545	30	400 A	0	0	0
73	205/60R15	94V		209	8.2	447	25.5	7	8.8	6J	670	1477	1477	31	400 A	0	0	0
74	205/55R15	94H		209	8.2	447	25.5	7	8.8	6J	670	1477	1477	31	400 A	0	0	0
75	205/55R16	95H		209	8.2	472	26.5	7	8.8	6J	690	1521	1521	31	400 A	0	0	0
76	205/70R14	95T		209	8.2	444	25.4	7	8.8	6J	690	1521	1521	44	400 A	0	0	0
77	205/70R15	95T		209	8.2	449	25.7	7	8.8	6J	710	1545	1545	44	400 A	0	0	0
78	215/55R14	97W	XL	226	8.9	442	25.3	7	8.8	7J	730	1609	1609	30	400 A	0	0	0
79	215/55R16	97V	XL	226	8.9	442	25.3	7	8.8	7J	730	1609	1609	30	400 A	0	0	0
80	215/60R14	95V		221	8.7	444	26.1	7	8.8	6.5J	690	1521	1521	31	400 A	0	0	0



				Sec. Width		Overall Dia		Tread Depth		RIM	Max. Load		Max Pressure		UTQG	(EU) 2020/740				
NO.	SIZE	L/S		mm	inch	mm	inch	mm	32nds		kgs	lbs	kPa	psi		R	W	LV		
81	215/60R16	99H	XL	221	8.7	664	26.1	7	8.8	6.5J	775	1709	1709	50	400 A.A.	0	0	0	0	
82	215/65R15	100H	XL	221	8.7	661	26.0	7	8.8	6.5J	800	1764	1764	50	400 A.A.	0	0	0	0	
83	215/65R15	96H		221	8.7	661	26.0	7	8.8	6.5J	710	1565	1565	51	400 A.A.	0	0	0	0	
84	215/65R16	102H	XL	221	8.7	686	27.0	7	8.8	6.5J	850	1874	1874	50	400 A.A.	0	0	0	0	
85	215/65R16	98H		221	8.7	684	27.0	7	8.8	6.5J	750	1652	1652	51	400 A.A.	0	0	0	0	
86	215/70R15	98T		221	8.7	683	26.9	7	8.8	6.5J	750	1652	1652	51	400 A.A.	0	0	0	0	
87	225/50R16	92V		233	9.2	632	24.9	7	8.8	7J	630	1389	1389	51	400 A.A.	0	0	0	0	
88	225/50R16	96W	XL	233	9.2	632	24.9	7	8.8	7J	710	1565	1565	50	400 A.A.	0	0	0	0	
89	225/55R16	99W	XL	233	9.2	654	25.7	7	8.8	7J	775	1709	1709	50	400 A.A.	0	0	0	0	
90	225/55R16	99V	XL	233	9.2	654	25.7	7	8.8	7J	775	1709	1709	50	400 A.A.	0	0	0	0	
91	225/60R16	98H		228	9.0	676	26.6	7	8.8	6.5J	750	1652	1652	51	400 A.A.	0	0	0	0	

- ARGOS UHP

-1



STABILITY



BRAKING



SNOW&ICE



Pattern Description

Four Asymmetric grooves and the bionic lateral groove design provide superb water evacuation for good driving performance on wet road


Optimized tread cavity profile and the equalized footprint to increased block rigidity ensuring a shorter high speed braking distance

A flatter tread profile puts more tire in contact with the road, for increased steering precision and road feedback which helps to enhance driving and cornering stability

New high Silica tread compound can reduce the tire rolling resistance and improve the wet performance



NO.	SIZE	L/S	Section Width		Overall Dia		Tread Depth		RIM	Max. Load		Max. Pressure		UTQG	EU 2020/740			
			mm	inch	mm	inch	mm	32nds		kg	lbs	kPa	psi		R	W	LY	
1	195/40ZR17	81W	XL	200	7.9	588	23.1	7.2	9.1	7.1	442	1019	1019	50	320 A A	C	B	69 A
2	195/45R16	78V		195	7.7	557	21.9	7.8	9.8	6.5 J	425	937	937	51	320 A A	C	B	69 B
3	195/45R16	84V	XL	195	7.7	582	22.9	7.8	9.8	6.5 J	500	1102	1102	50	320 A A	C	B	69 A
4	195/45ZR17	85W	XL	195	7.7	608	23.9	7.8	9.8	6.5 J	515	1135	1135	50	320 A A	C	B	69 A
5	205/40ZR17	84W	XL	213	8.3	594	23.3	7.8	9.8	7.5 J	500	1102	1102	50	320 A A	C	B	69 A
6	205/45ZR14	87W	XL	204	8.1	590	23.2	7.8	9.8	7.1	545	1201	1201	50	320 A A	C	B	69 A
7	205/45ZR17	88W	XL	204	8.1	616	24.3	7.8	9.8	7.1	565	1235	1235	50	320 A A	C	B	69 A
8	205/50ZR17	92W	XL	214	8.4	638	25.1	7.8	9.8	6.5 J	650	1433	1433	50	320 A A	C	B	69 A
9	205/50R14	91W		214	8.4	632	24.9	7.8	9.8	6.5 J	610	1354	1354	51	320 A A	C	B	69 B
10	205/55ZR14	94W	XL	214	8.4	632	24.9	7.8	9.8	6.5 J	670	1477	1477	50	320 A A	C	B	69 A
11	205/55ZR17	95W	XL	214	8.4	658	25.9	7.8	9.8	6.5 J	690	1521	1521	50	320 A A	C	B	69 A
12	205/55ZR19	97W	XL	214	8.4	709	27.9	7.2	9.1	6.5 J	730	1609	1609	50	320 A A	C	B	69 A
13	215/55ZR18	84W	XL	218	8.6	607	23.9	7.8	9.8	7.5 J	500	1102	1102	50	320 A A	C	B	69 A
14	215/40ZR16	86W	XL	218	8.6	578	22.8	7.8	9.8	7.5 J	530	1168	1168	50	320 A A	C	B	69 A
15	215/40ZR17	87W	XL	218	8.6	604	23.8	7.8	9.8	7.5 J	545	1201	1201	50	320 A A	C	B	69 A
16	215/40ZR18	89W	XL	218	8.6	629	24.8	7.8	9.8	7.5 J	580	1279	1279	50	320 A A	C	B	69 A
17	215/40ZR18	89V	XL	218	8.6	629	24.8	7.8	9.8	7.5 J	580	1279	1279	50	320 A A	C	B	69 A
18	215/45R16	86H		213	8.4	600	23.6	7.8	9.8	7.1	530	1168	1168	51	320 A A	C	B	69 B
19	215/45R16	90V	XL	213	8.4	600	23.6	7.8	9.8	7.1	600	1323	1323	50	320 A A	C	B	69 A
20	215/45ZR17	91W	XL	213	8.4	626	24.6	7.8	9.8	7.1	615	1354	1354	50	320 A A	C	B	69 A
21	215/45ZR18	93V	XL	213	8.4	651	25.6	7.8	9.8	7.1	680	1493	1493	50	320 A A	C	B	69 A
22	215/50ZR17	95W	XL	224	8.9	648	25.5	7.8	9.8	7.1	690	1521	1521	50	320 A A	C	B	69 A
23	215/50ZR18	92W		224	8.9	673	26.5	7.2	9.1	7.1	630	1389	1389	51	320 A A	C	B	69 B
24	215/55R18	99V	XL	224	8.9	693	27.3	7.8	9.8	7.1	775	1709	1709	50	320 A A	C	B	69 A
25	215/55ZR17	88W	XL	221	8.7	648	25.3	7.8	9.8	7.1	750	1653	1653	50	320 A A	C	B	69 A
26	225/20ZR19	84Y	XL	230	9.1	619	24.4	7.8	9.8	8.1	580	1102	1102	50	320 A A	C	B	69 A
27	225/30ZR18	85W	XL	230	9.1	644	25.4	7.2	9.1	8.1	515	1135	1135	50	320 A A	C	B	69 A
28	225/35ZR18	87Y	XL	230	9.1	615	24.2	7.2	9.1	8.1	545	1201	1201	50	320 A A	C	B	69 A
29	225/35ZR19	88W	XL	230	9.1	641	25.2	7.8	9.8	8.1	540	1235	1235	50	320 A A	C	B	69 A
30	225/35ZR19	88Y	XL	230	9.1	641	25.2	7.8	9.8	8.1	560	1235	1235	50	320 A A	C	B	69 A
31	225/35ZR20	90W	XL	230	9.1	664	26.2	7.2	9.1	8.1	600	1323	1323	50	320 A A	C	B	69 A
32	225/35ZR20	93W	XL	230	9.1	664	26.2	7.2	9.1	8.1	650	1433	1433	50	320 A A	C	B	69 A
33	225/40ZR18	92W	XL	230	9.1	637	25.1	7.8	9.8	8.1	630	1389	1389	50	320 A A	C	B	69 A
34	225/40ZR18	92Y	XL	230	9.1	637	25.1	7.8	9.8	8.1	630	1389	1389	50	320 A A	C	B	69 A
35	225/40ZR19	93Y	XL	230	9.1	663	26.1	7.8	9.8	8.1	650	1433	1433	50	320 A A	C	B	69 A
36	225/45ZR17	94W	XL	225	8.9	634	25.0	7.8	9.8	7.5 J	670	1477	1477	50	320 A A	C	B	69 A
37	225/45ZR17	94Y	XL	225	8.9	634	25.0	7.8	9.8	7.5 J	670	1477	1477	50	320 A A	C	B	69 A
38	225/45ZR18	95W	XL	225	8.9	659	25.9	7.8	9.8	7.5 J	690	1521	1521	50	320 A A	C	B	69 A
39	225/45ZR18	95Y	XL	225	8.9	659	25.9	7.8	9.8	7.5 J	690	1521	1521	50	320 A A	C	B	69 A
40	225/45ZR19	96Y	XL	225	8.9	685	27.0	7.8	9.8	7.5 J	710	1565	1565	50	320 A A	C	B	69 A
41	225/50ZR17	98W	XL	233	9.2	658	25.9	7.8	9.8	7.1	750	1653	1653	50	320 A A	C	B	69 A
42	225/50ZR17	98Y	XL	233	9.2	658	25.9	7.8	9.8	7.1	750	1653	1653	50	320 A A	C	B	69 A
43	225/50ZR18	99W	XL	233	9.2	683	26.9	7.2	9.1	7.1	775	1709	1709	50	320 A A	C	B	69 A

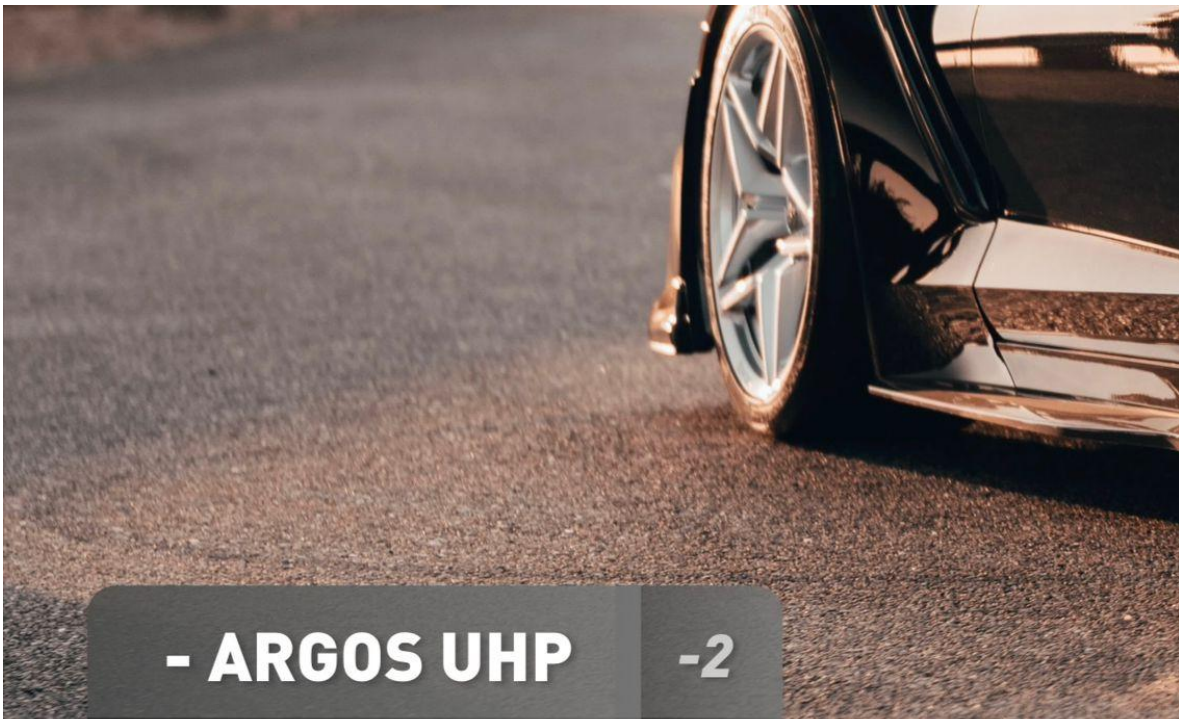

- ARGOS UHP -2

NO.	SIZE	LI/S	Section Width		Overall Dia		Tread Depth		RIM	Max. Load		Max. Pressure		UTQG	(EU) 2020/740			
			(mm)	inch	(mm)	inch	(mm)	32nds		kgs	lbs	kPa	psi		R	W	LV	
44	225/55R18	98H	233	9.2	705	27.8	7.8	9.8	7J	750	1653	1653	51	320 A A	C	B	69	B
45	225/50R18	98Y	233	9.2	705	27.8	7.8	9.8	7J	750	1653	1653	51	320 A A	C	B	69	B
46	225/52ZR17	101W	XL	233	680	26.8	7.8	9.8	7J	825	1819	1819	50	320 A A	C	B	69	A
47	225/52ZR19	103W	XL	233	731	28.8	7.8	9.1	7J	875	1929	1929	50	320 A A	C	B	69	A
48	235/30ZR20	88Y	XL	241	650	25.6	7.5	9.4	8.5J	640	1235	1235	50	320 A A	C	B	69	A
49	235/35ZR19	91W	XL	241	647	25.5	7.8	9.8	8.5J	615	1356	1356	50	320 A A	C	B	69	A
50	235/35ZR19	91Y	XL	241	647	25.5	7.8	9.8	8.5J	615	1356	1356	50	320 A A	C	B	69	A
51	235/40ZR18	95W	XL	241	645	25.4	7.8	9.8	8.5J	690	1521	1521	50	320 A A	C	B	69	A
52	235/40ZR18	95Y	XL	241	645	25.4	7.8	9.8	8.5J	690	1521	1521	50	320 A A	C	B	69	A
53	235/40ZR19	96Y	XL	241	671	26.4	7.8	9.8	8.5J	710	1565	1565	50	320 A A	C	B	69	A
54	235/45ZR17	97W	XL	236	644	25.4	7.8	9.8	8J	730	1609	1609	50	320 A A	C	B	69	A
55	235/45ZR18	98W	XL	236	649	26.3	7.8	9.8	8J	750	1653	1653	50	320 A A	C	B	69	A
56	235/45ZR19	99Y	XL	236	695	27.4	7.2	9.1	8J	775	1709	1709	50	320 A A	C	B	69	A
57	235/50ZR17	100W	XL	245	668	26.3	7.2	9.1	7.5J	800	1764	1764	50	320 A A	C	B	69	A
58	235/50ZR18	97W		245	693	27.3	7.8	9.8	7.5J	730	1609	1609	51	320 A A	C	B	69	B
59	235/50ZR18	101Y	XL	245	693	27.3	7.8	9.8	7.5J	825	1819	1819	50	320 A A	C	B	69	A
60	235/50ZR19	103W	XL	245	719	28.3	7.8	9.8	7.5J	875	1929	1929	50	320 A A	C	B	69	A
61	235/50ZR19	103Y	XL	245	719	28.3	7.8	9.8	7.5J	875	1929	1929	50	320 A A	C	B	69	A
62	235/52ZR17	103W	XL	245	690	27.2	7.8	9.8	7.5J	875				320 A A	C	B	69	A
63	235/52ZR18	104W	XL	245	715	28.1	7.8	9.8	7.5J	900	1984	1984	50	320 A A	C	B	69	A
64	235/52ZR18	104Y	XL	245	715	28.1	7.8	9.8	7.5J	900	1984	1984	50	320 A A	C	B	69	A
65	235/55ZR19	105Y	XL	245	741	29.2	7.8	9.8	7.5J	925	2039	2039	50	320 A A	C	B	69	A
66	245/30ZR20	90Y	XL	248	656	25.8	7.2	9.1	8.5J					320 A A	C	B	69	A
67	245/30ZR20	95Y	XL	248	656	25.8	7.2	9.1	8.5J	690	1521	1521	50	320 A A	C	B	69	A
68	245/35ZR18	92Y	XL	248	629	24.8	7.2	9.1	8.5J	630	1389	1389	50	320 A A	C	B	69	A
69	245/35ZR19	92W	XL	248	635	25.8	7.8	9.8	8.5J	690	1521	1521	50	320 A A	C	B	69	A
70	245/35ZR19	93Y	XL	248	655	25.8	7.8	9.8	8.5J	650	1433	1433	50	320 A A	C	B	69	A
71	245/35ZR20	95Y	XL	248	680	26.8	7.8	9.8	8.5J	690	1521	1521	50	320 A A	C	B	69	A
72	245/40ZR17	95W	XL	248	678	26.7	7.8	9.8	8.5J	690	1521	1521	50	320 A A	C	B	69	A
73	245/40ZR18	97W	XL	248	683	26.7	7.8	9.8	8.5J	720	1609	1609	50	320 A A	C	B	69	A
74	245/40ZR19	97Y	XL	248	652	25.7	7.8	9.8	8.5J	720	1609	1609	50	320 A A	C	B	69	A
75	245/40ZR19	98W	XL	248	670	26.2	7.8	9.8	8.5J	750	1653	1653	50	320 A A	C	B	69	A
76	245/40ZR19	98Y	XL	248	679	26.7	7.8	9.8	8.5J	750	1653	1653	50	320 A A	C	B	69	A
77	245/40ZR20	99Y	XL	248	704	27.7	7.8	9.8	8.5J	775	1709	1709	50	320 A A	C	B	69	A
78	245/45ZR17	99W	XL	243	652	25.7	7.8	9.8	8J	775	1709	1709	50	320 A A	C	B	69	A
79	245/45ZR18	100W	XL	243	670	26.2	7.8	9.8	8J	800	1764	1764	50	320 A A	C	B	69	A
80	245/45ZR18	100Y	XL	243	677	26.7	7.8	9.8	8J	800	1764	1764	50	320 A A	C	B	69	A
81	245/45ZR19	100W	XL	243	696	27.2	7.8	9.8	8J	800	1876	1876	50	320 A A	C	B	69	A
82	245/45ZR19	102Y	XL	243	703	27.7	7.8	9.8	8J	850	1874	1874	50	320 A A	C	B	69	A
83	245/45ZR20	102W	XL	243	728	28.7	7.8	9.8	8J	875	1929	1929	50	320 A A	C	B	69	A
84	245/45ZR20	103Y	XL	243	728	28.7	7.8	9.8	8J	875	1929	1929	50	320 A A	C	B	69	A
85	245/50ZR18	104W	XL	253	703	27.7	7.8	9.8	7.5J	900	1984	1984	50	320 A A	C	B	69	A
86	245/50ZR20	105Y	XL	253	754	29.7	7.2	9.1	7.5J	925	2039	2039	50	320 A A	C	B	69	A



NO.	SIZE	L/S	Section Width		Overall Dia		Tread Depth		RIM	Max. Load		Max. Pressure		UTQG	IEU 2020/740			
			mm	inch	mm	inch	mm	32nds		kgs	lbs	kPa	psi		R	W	LV	
87	245/55ZR19	107W	XL	253	10.0	753	29.4	7.8	9.8	9.5	725	2541	2349	50	320 A A	C	B	69 A
88	255/50ZR19	91Y	XL	260	10.2	637	25.1	7.8	9.8	9.1	615	1356	1356	50	320 A A	C	B	69 A
89	255/50ZR20	92Y	XL	265	10.2	642	25.1	7.8	9.8	9.1	630	1381	1381	50	320 A A	C	B	69 A
90	255/50ZR18	94W	XL	240	10.2	635	25.0	7.8	9.8	9.1	670	1477	1477	50	320 A A	C	B	69 A
91	255/50ZR18	94Y	XL	240	10.2	635	25.0	7.8	9.8	9.1	670	1477	1477	50	320 A A	C	B	69 A
92	255/50ZR19	96W	XL	240	10.2	661	26.0	7.8	9.8	9.1	710	1565	1565	50	320 A A	C	B	69 A
93	255/50ZR19	96Y	XL	240	10.2	661	26.0	7.8	9.8	9.1	710	1565	1565	50	320 A A	C	B	69 A
94	255/50ZR20	97Y	XL	240	10.2	686	27.0	7.5	9.4	9.1	730	1609	1609	50	320 A A	C	B	69 A
95	255/40ZR18	99W	XL	240	10.2	661	26.0	7.8	9.8	9.1	775	1709	1709	50	320 A A	C	B	69 A
96	255/40ZR18	99Y	XL	240	10.2	661	26.0	7.8	9.8	9.1	775	1709	1709	50	320 A A	C	B	69 A
97	255/40ZR19	100W	XL	240	10.2	687	27.0	7.8	9.8	9.1	800	1764	1764	50	320 A A	C	B	69 A
98	255/40ZR19	100Y	XL	240	10.2	687	27.0	7.8	9.8	9.1	800	1764	1764	50	320 A A	C	B	69 A
99	255/40ZR20	101Y	XL	240	10.2	712	28.0	7.2	9.1	9.1	825	1819	1819	50	320 A A	C	B	69 A
100	255/45ZR18	103W	XL	255	10.0	687	27.0	7.8	9.8	8.5	875	1929	1929	50	320 A A	C	B	69 A
101	255/45ZR18	103Y	XL	255	10.0	687	27.0	7.8	9.8	8.5	875	1929	1929	50	320 A A	C	B	69 A
102	255/45ZR19	104Y	XL	255	10.0	713	28.1	7.8	9.8	8.5	900	1984	1984	50	320 A A	C	B	69 A
103	255/50ZR20	108Y	XL	265	10.0	738	29.1	7.2	9.1	8.5	925	2039	2039	50	320 A A	C	B	69 A
104	255/50ZR19	107Y	XL	265	10.4	739	29.1	7.8	9.8	8.1	975	2149	2149	50	320 A A	C	B	69 A
105	255/50ZR20	109W	XL	265	10.4	764	30.1	7.2	9.1	8.1	1000	2221	2221	50	320 A A	C	B	69 A
106	255/50ZR20	109Y	XL	265	10.4	764	30.1	7.2	9.1	8.1	1000	2221	2221	50	320 A A	C	B	69 A
107	255/50ZR18	109Y	XL	265	10.4	727	29.0	7.8	9.8	8.1	1000	2221	2221	50	320 A A	C	B	69 A
108	255/55ZR18	109Y	XL	265	10.4	737	29.0	7.8	9.8	8.1	1000	2221	2221	50	320 A A	C	B	69 A
109	255/55ZR18	110W	XL	265	10.4	763	30.0	7.8	9.8	8.1	1000	2221	2221	50	320 A A	C	B	69 A
110	255/50ZR20	110W	XL	265	10.4	788	31.0	7.2	9.1	8.1	1060	2337	2337	50	320 A A	C	B	69 A
111	265/50ZR19	93W	XL	271	10.7	643	25.3	7.8	9.8	9.5	650	1433	1433	50	320 A A	C	B	69 A
112	265/50ZR18	97W	XL	271	10.7	643	25.3	7.8	9.8	9.5	730	1609	1609	50	320 A A	C	B	69 A
113	265/50ZR18	97Y	XL	271	10.7	643	25.3	7.8	9.8	9.5	730	1609	1609	50	320 A A	C	B	69 A
114	275/50ZR19	110Y	XL	277	10.9	769	29.5	7.2	9.1	8.5	1060	2337	2337	50	320 A A	C	B	69 A
115	275/50ZR19	96Y	XL	278	10.9	649	25.6	7.8	9.8	9.5	710	1565	1565	50	320 A A	C	B	71 B
116	275/50ZR20	97Y	XL	278	10.9	674	26.5	7.5	9.4	9.5	730	1609	1609	50	320 A A	C	B	71 B
117	275/50ZR19	100Y	XL	278	10.9	675	26.6	7.8	9.8	9.5	800	1764	1764	50	320 A A	C	B	71 B
118	275/50ZR20	100Y	XL	278	10.9	675	26.6	7.8	9.8	9.5	800	1764	1764	50	320 A A	C	B	71 B
119	275/40ZR19	105Y	XL	278	10.9	703	27.7	7.8	9.8	9.5	925	2039	2039	50	320 A A	C	B	71 B
120	275/45ZR19	108Y	XL	273	10.7	731	28.8	7.2	9.1	9.1	1000	2205	2205	50	320 A A	C	B	71 B
121	285/55ZR19	111W	XL	284	11.2	785	30.9	7.8	9.8	8.5	1090	2403	2403	50	320 A A	C	B	71 B
122	285/45ZR19	111W	XL	285	11.2	739	29.1	7.8	9.8	9.5	1090	2403	2403	50	320 A A	C	B	72 A
123	285/45ZR19	111Y	XL	285	11.2	739	29.1	7.8	9.8	9.5	1090	2403	2403	50	320 A A	C	B	72 A



- ARGOS H-T



STABILITY



BRAKING



SNOW&ICE



Pattern Description

Four grooves improve hydroplaning performance by efficient water drainage

The closed outside rib and the sipe design can disperse the noise to improve the ride performance

Optimized profile pattern design, ensure the tire handling and hydroplaning performance



NO.	SIZE	L/S	Section Width		Overall Dia		Tread Depth		RIM	Max. Load		Max Pressure		UTQG	[EU 2020/740]			
			mm	inch	mm	inch	mm	32nds		kg	lbs	kPa	psi		R	W	LV	
1	215/60R17	100H	XL	221	8.7	670	27.2	8.4	10.4	6.5J	800	1764	1764	50	500 A A	C	C	70 B
2	215/55R17	99H		221	8.7	712	28.0	8.4	10.4	6.5J	775	1709	1709	51	500 A A	C	C	70 B
3	215/70R16	100H		221	8.7	708	27.9	8.4	10.4	6.5J	800	1764	1764	51	500 A A	C	C	70 B
4	225/55R18	98H		233	9.2	705	27.8	8.4	10.4	7J	750	1653	1653	44	500 A A	C	C	70 B
5	225/60R17	99H		228	9.0	702	27.6	8.4	10.4	6.5J	775	1709	1709	44	500 A A	C	C	70 B
6	225/60R18	100V		228	9.0	727	28.6	8.4	10.4	6.5J	800	1764	1764	51	500 A A	C	C	70 B
7	225/60R17	100H		228	9.0	704	28.5	8.4	10.4	6.5J	800	1764	1764	44	500 A A	C	C	70 B
8	225/70R16	107H	XL	238	9.4	722	28.4	8.4	10.4	6.5J	975	2149	2149	50	500 A A	C	C	70 B
9	235/60R16	100H		240	9.4	688	27.1	8.4	10.4	7J	800	1764	1764	51	500 A A	C	C	70 B
10	235/60R17	106H	XL	240	9.4	714	28.1	8.4	10.4	7J	950	2094	2094	50	500 A A	C	C	70 B
11	235/60R18	107H	XL	242	9.4	739	29.1	8.4	10.4	7J	975	2149	2149	50	500 A A	C	C	70 B
12	235/60R18	107V	XL	240	9.4	739	29.1	8.4	10.4	7J	975	2149	2149	50	500 A A	C	C	70 B
13	235/65R16	107H XL		240	9.4	712	28.0	8.3	10.5	7J	975	2149	2149	50	500 A A	C	C	70 B
14	235/65R17	108H	XL	240	9.4	728	29.1	8.4	10.4	7J	1000	2205	2205	50	500 A A	C	C	70 B
15	235/65R17	108V	XL	242	9.4	738	29.1	8.4	10.4	7J	1000	2205	2205	50	500 A A	C	C	70 B
16	235/65R18	110H XL		240	9.4	763	30.0	8.3	10.5	7J	1040	2337	2337	50	500 A A	C	C	70 B
17	235/70R16	106H		240	9.4	734	29.0	8.4	10.4	7J	950	2094	2094	51	500 A A	C	C	70 B
18	245/60R18	105H		248	9.8	751	29.6	8.4	10.4	7J	925	2039	2039	51	500 A A	C	C	70 B
19	245/60R17	111H	XL	242	9.8	750	29.5	8.4	10.4	7J	1090	2403	2403	50	500 A A	C	C	70 B
20	245/70R16	111H	XL	248	9.8	750	29.5	8.4	10.4	7J	1090	2403	2403	50	500 A A	C	C	70 B
21	245/70R17	110H		242	9.8	754	30.4	8.4	10.4	7J	1040	2337	2337	51	500 A A	C	C	70 B
22	255/55R18	109V	XL	265	10.4	737	29.0	8.4	10.4	8J	1030	2271	2271	50	500 A A	C	C	71 B
23	255/60R17	110H	XL	260	10.2	738	29.1	8.4	10.4	7.5J	1040	2337	2337	50	500 A A	C	C	71 B
24	255/60R17	110V	XL	260	10.2	738	29.1	8.4	10.4	7.5J	1040	2337	2337	50	500 A A	C	C	71 B
25	255/60R18	112H	XL	260	10.2	763	30.0	8.4	10.4	7.5J	1120	2449	2449	50	500 A A	C	C	71 B
26	255/60R18	112V	XL	260	10.2	763	30.0	8.4	10.4	7.5J	1120	2449	2449	50	500 A A	C	C	71 B
27	255/65R16	109H		260	10.2	738	29.1	8.3	10.5	7.5J	1030	2271	2271	51	500 A A	C	C	71 B
28	255/65R17	110H		260	10.2	764	30.1	8.4	10.4	7.5J	1040	2337	2337	51	500 A A	C	C	71 B
29	255/65R17	110V		260	10.2	764	30.1	8.4	10.4	7.5J	1040	2337	2337	51	500 A A	C	C	71 B
30	255/70R16	111H		260	10.2	764	30.1	8.4	10.4	7.5J	1090	2403	2403	51	500 A A	C	C	71 B
31	255/70R18	113H		260	10.2	815	32.1	8.3	10.5	7.5J	1150	2535	2535	51	500 A A	C	C	71 B
32	265/60R18	110H		272	10.7	775	30.5	8.4	10.4	8J	1040	2337	2337	44	500 A A	C	C	71 B
33	265/60R17	112H		272	10.7	776	30.4	8.8	11.1	8J	1120	2449	2449	51	500 A A	C	C	71 B
34	265/65R18	114H		272	10.7	801	31.5	8.3	10.5	8J	1180	2601	2601	51	500 A A	C	C	71 B
35	265/70R16	112H		272	10.7	778	30.6	8.8	11.1	8J	1120	2449	2449	51	500 A A	C	C	71 B
36	265/70R17	115H		272	10.7	804	31.7	8.8	11.1	8J	1215	2679	2679	51	500 A A	C	C	71 B
37	275/65R17	115H		279	11.0	790	31.1	8.8	11.1	8J	1215	2679	2679	51	500 A A	C	C	71 B
38	275/65R18	116H		279	11.0	815	32.1	8.8	11.1	8J	1250	2756	2756	51	500 A A	C	C	71 B
39	275/70R16	114H		279	11.0	792	31.2	8.8	11.1	8J	1180	2601	2601	51	500 A A	C	C	71 B
40	285/60R18	120H	XL	292	11.5	799	31.5	8.8	11.1	8.5J	1400	3086	3086	50	500 A A	C	C	72 A
41	285/65R17	116H		292	11.5	802	31.6	8.8	11.1	8.5J	1250	2756	2756	51	500 A A	C	C	72 B

- TRANSPORTER RF09



STABILITY



BRAKING



SNOW&ICE



Pattern Description

Provide the grip of the ground on cornering and handling performance with strong close pattern block

To tread grooves and high density steel design to enhance wetland maneuverability, prevent hydroplaning, and automatic cleaning ability, enhance the slippery road safety

The special tread formula improves tire wear and handling and provides a strong grip



NO.	SIZE	L/S	Section Width		Overall Dia		Tread Depth		RIM	Max. Load		Max. Pressure		(EU) 2020/740			
			[mm]	inch	[mm]	inch	[mm]	32nds		kg	lbs	kPa	psi	R	W	LV	
1	175/75R14C	101/99R	177	7.0	668	26.3	8.5	10.7	5J	825/775	1819/1709	1819/1709	69	D	C	72	B
2	185/75R14C	104/102R	184	7.2	684	26.9	8.7	11.0	5J	900/850	1984/1874	1984/1874	69	D	C	72	B
3	185R14C	102/100R	188	7.4	690	27.4	8.7	11.0	5.5J	890/800	1874/1764	1874/1764	65	D	C	72	B
4	195/60R14C	99/97H	201	7.9	640	25.2	9	11.3	6J	775/730	1709/1609	1709/1609	54	D	C	72	B
5	195/65R14C	104/102T	201	7.9	640	26.0	10	12.6	6J	900/850	1984/1874	1984/1874	69	D	C	72	B
6	195/70R15C	104/102R	201	7.9	655	25.8	10.5	13.2	6J	900/850	1984/1874	1984/1874	65	D	C	72	B
7	195/75R14C	107/105R	196	7.7	698	27.5	9	11.3	5.5J	875/825	2149/2039	2149/2039	69	D	C	72	B
8	195R14C	106/104Q	198	7.8	666	26.2	9	11.3	5.5J	950/900	2094/1984	2094/1984	65	D	C	72	B
9	215R15C	104/104R	199	7.8	690	27.2	9	11.3	5.5J	950/900	2094/1984	2094/1984	65	D	C	72	B
10	205/65R14C	107/105T	209	8.2	672	26.5	10	12.6	6J	975/925	2149/2039	2149/2039	69	D	C	72	B
11	205/70R15C	104/104R	209	8.2	688	27.3	10.5	13.2	6J	950/900	2094/1984	2094/1984	65	D	C	72	B
12	205/75R14C	110/108R	203	8.0	714	28.1	10	12.6	5.5J	1040/1000	2337/2205	2337/2205	69	D	C	72	B
13	215/60R14C	103/101T	221	8.7	664	26.1	10	12.6	6.5J	875/825	1929/1819	1929/1819	54	D	C	72	B
14	215/65R14C	109/107R	221	8.7	686	27.0	10	12.6	6.5J	1030/975	2271/2149	2271/2149	69	D	C	72	B
15	215/70R15C	109/107R	221	8.7	693	26.9	10	12.6	6.5J	1030/975	2271/2149	2271/2149	65	D	C	72	B
16	215/75R14C	113/111R	214	8.5	728	28.7	10	12.6	6J	1150/1090	2535/2403	2535/2403	69	D	C	72	B
17	225/65R14C	112/110R	228	9.0	698	27.5	10	12.6	6.5J	1120/1060	2469/2337	2469/2337	69	D	C	72	B
18	225/70R15C	112/110R	228	9.0	697	27.4	10.5	13.2	6.5J	1120/1060	2469/2337	2469/2337	65	D	C	72	B
19	235/65R14C	115/113R	240	9.4	712	28.0	10	12.6	7J	1215/1150	2679/2535	2679/2535	69	D	C	72	B

- ARGOS AT08



STABILITY



BRAKING



SNOW&ICE



Pattern Description



- Strong shoulder block can supply enough traction power on dry road and excellent handling performance on cornering
- The distribution of four wide main groove and strong pattern ,achieve the excellent performance on the original road
- Especially transverse groove design can avoid the irregular wear and tear
- Different depth of transverse grooves design,guaranteed the perfect driving force under different wear conditions,at the same time, greatly enhanced the strength of tread pattern,make it more safe and reliable
- The distribution of irregular pattern groove,reduce noise,make it more quiet



NO.	SIZE	LWS	Section Width		Overall Dia		Tread Depth		RIM	Max. Load		Max Pressure		UTQG	[EU] 2020/740			
			mm	inch	mm	inch	mm	32nds		kg	lbs	kPa	psi		R	W	LV	
1	215/70R16	100T	BSW	201	8.7	708	27.9	9.0	12.5	8.5J	800	1764	1764	51	540 A B	D	C	71 B
2	215/70R16	100T	OWL	221	8.7	708	27.9	9.9	12.5	8.5J	800	1764	1764	51	540 A B	D	D	8 A
3	215/65R17	101T	BSW	208	8.2	762	27.6	9.4	12.5	8.5J	775	1709	1709	51	540 A B	D	C	71 B
4	225/65R17	102T	BSW	228	9.0	724	28.5	9.9	12.5	8.5J	850	1874	1874	51	540 A B	D	C	71 B
5	225/65R16	100T	BSW	208	8.2	762	27.6	9.4	12.5	8.5J	875	1929	1929	51	540 A B	D	C	71 B
6	225/70R16	101T	OWL	228	9.0	722	28.4	9.9	12.5	8.5J	875	1929	1929	51	540 A B	D	D	8 A
7	225/65R16	100T	BSW	201	8.8	744	27.3	9.0	12.5	8.5	900	1984	1984	51	540 A B	D	C	71 B
8	225/75R16	104T	OWL	223	8.8	744	27.3	9.9	12.5	8.5	900	1984	1984	51	540 A B	D	D	8 A
9	225/65R17	100T	BSW	248	9.4	738	29.1	9.0	12.5	8.5	900	1984	1984	51	540 A B	D	C	71 B
10	225/65R17	104T	OWL	240	9.4	738	29.1	9.9	12.5	8.5	900	1984	1984	51	540 A B	D	D	8 A
11	225/70R16	100T	BSW	248	9.4	736	29.0	9.0	12.5	8.5	900	2076	2076	51	540 A B	D	C	71 B
12	225/70R16	104T	OWL	240	9.4	736	29.0	9.9	12.5	8.5	900	2076	2076	51	540 A B	D	D	8 A
13	245/65R17	111T XL	BSW	248	9.8	750	29.5	9.0	12.5	8.5	1090	2403	2403	50	540 A B	D	C	72 B
14	245/65R17	111T XL	OWL	248	9.8	750	29.5	9.9	12.5	8.5	1090	2403	2403	50	540 A B	D	D	8 A
15	245/70R16	111T XL	BSW	244	9.8	750	29.5	9.0	12.5	8.5	1090	2403	2403	50	540 A B	D	C	72 B
16	245/70R17	110T	BSW	248	9.8	776	30.6	9.5	12.0	8.5	1040	2337	2337	51	540 A B	D	C	71 B
17	255/65R17	110T	BSW	260	10.2	764	30.1	9.5	12.0	7.5J	1040	2337	2337	51	540 A B	D	C	72 B
18	255/70R16	111T	BSW	240	10.2	764	30.1	9.5	12.0	7.5J	1090	2403	2403	51	540 A B	D	C	72 B
19	265/60R20	111H XL	BSW	277	10.9	776	30.5	9.5	12.0	8.5J	1090	2403	2403	50	540 A B	D	C	72 B
20	265/60R18	110T	BSW	272	10.7	778	30.5	9.5	12.0	8.5	1040	2337	2337	51	540 A B	D	C	72 B
21	265/60R18	114T XL	BSW	272	10.7	778	30.5	9.5	12.0	8.5	1180	2601	2601	50	540 A B	D	C	72 B
22	265/65R17	112T	BSW	272	10.7	776	30.6	10.4	13.1	8.5	1120	2469	2469	51	540 A B	D	C	72 B
23	265/65R17	112T	OWL	272	10.7	776	30.6	10.4	13.1	8.5	1120	2469	2469	51	540 A B	D	D	8 A
24	265/70R16	112T	BSW	272	10.7	778	30.6	9.5	12.0	8.5	1120	2469	2469	51	540 A B	D	C	72 B
25	265/70R17	115T	BSW	272	10.7	804	31.7	10.4	13.1	8.5	1215	2679	2679	51	540 A B	D	C	72 B
26	265/70R17	115T	OWL	272	10.7	804	31.7	10.4	13.1	8.5	1215	2679	2679	51	540 A B	D	D	8 A
27	275/70R16	114T	BSW	279	11.0	792	31.2	9.5	12.0	8.5	1180	2601	2601	51	540 A B	D	C	72 B
28	285/50R20	116H XL	BSW	297	11.7	794	31.3	9.5	12.0	9.5	1250	2756	2756	50	540 A B	D	C	75 B
29	285/60R18	116T	BSW	292	11.5	799	31.5	10.4	13.1	8.5J	1250	2756	2756	51	540 A B	D	C	73 B
30	L7215/75R15 C	100/97S	BSW	214	8.5	703	27.7	12.5	15.7	6.5	800/925	1765/1610	1765/1610	50	0	0	0	0
31	L7215/75R15 C	100/97S	OWL	214	8.5	703	27.7	12.5	15.7	6.5	800/925	1765/1610	1765/1610	50	0	0	0	0
32	L7225/75R15 C	104/101S	BSW	235	9.3	733	28.9	12.5	15.7	6.5J	900/925	1985/1820	1985/1820	50	0	0	0	0
33	L7225/75R15 C	104/101S	OWL	235	9.3	733	28.9	12.5	15.7	6.5J	900/925	1985/1820	1985/1820	50	0	0	0	0

- ARGOS M/T



STABILITY



BRAKING



SNOW&ICE



Pattern Description

- Aggressive wide-block and groove design made for mud and rock crawling, while balancing on-road driving performance
- The huge shoulder block is designed with stiffener, which can improve the block stiffness, to improve the traction and handling performance on off-road
- The sidewall block design, not only constitutes a very aggressive appearance, but also prevent side impact from stone and improve the traction on the soft land
- 3 Body ply & special steel belt construction design provide stronger puncture resistance and high load performance



			Section Width		Overall Dia		Tread Depth		RIM	Max. Load		Max. Pressure		IEU 2020/740				
NO.	SIZE	L/S	(mm)	inch	(mm)	inch	(mm)	32nds		kgs	lbs	kPa	psi	R	W	LV		
1	21X10.50R15LT	10R0	BSW	268	10.4	775	30.5	15	18.9	8.5J	1000	2270	2270	50	0	0	0	
2	33X12.50R15LT	10R0	BSW	318	12.5	826	32.5	15	18.9	10J	1000	2205	2205	35	0	0	0	
3	33X12.50R17LT	1200	BSW															
4	33X12.50R18LT	1180	BSW															
5	35X12.50R17LT	1250	BSW															
6	35X12.50R18LT	1230	BSW															
7	LT225/75R16	115/1120	BSW															
8	LT245/75R16	120/1140	BSW	268	9.8	774	30.5	15	18.9	7J	1380/1240	3042/2778	3042/2778	80	0	0	0	
9	LT265/70R17	123/1180	BSW	292	10.7	804	31.7	15	18.9	8J	1450/1320	3195/2910	3195/2910	80	0	0	0	
10	LT265/75R16	123/1200	BSW	267	10.5	804	31.7	15	18.9	7.5J	1550/1400	3420/3085	3420/3085	80	0	0	0	
11	LT285/70R17	121/1180	BSW	292	11.5	832	32.8	15	18.9	8.5J	1450/1320	3195/2910	3195/2910	65	0	0	0	
12	LT285/75R16	126/1230	BSW															
13	LT305/70R16	124/1210	BSW															
14	LT315/75R16	127/1240	BSW															



- ARGOS RF06



STABILITY



BRAKING



SNOW&ICE



Pattern Description

- Tire not only has good performance on paved road, but also has good performance on mountain, mud and sand road
- 3D pattern design prevent the irregular wear, improve wear resistance performance
- Creative pattern design improve the grip and handling performance on paved and unpaved road



			Sec Width		Overall Dia		Tread Depth		RIM	Max Load		Max Pressure		UTQG	IEU 2020/740			
NO.	SIZE	L/S	[mm]	inch	[mm]	inch	[mm]	32nds		kg	lbs	kPa	psi		R	W	LV	
1	235/70R14	1067	OWL	240	9.4	734	29.0	10	12.4	7.1	950	2094	2094	44	440 A B	0	0	0
2	245/70R14	1077	OWL	248	9.8	750	29.5	10	12.6	7.1	975	2149	2149	44	440 A B	0	0	0
3	21X12.50R15LT C	1095	OWL	268	10.4	778	30.6	12.5	15.7	8.5J	1030	2270	2270	50	0	0	0	
4	33X12.50R15LT	1085	OWL	318	12.5	826	32.5	12.5	15.7	10J	1000	2205	2205	35	0	0	0	
5	L7225/75R14	1151/1125	OWL	223	8.8	744	29.3	11	13.9	6.1	1215/1120	2485/2470	2485/2470	80	0	0	0	
6	L7245/70R17	1191/1165	OWL	248	9.8	776	30.4	11	13.9	7.1	1240/1250	3000/2755	3000/2755	80	0	0	0	
7	L7245/75R14	1201/1165	OWL	248	9.8	774	30.5	12	15.1	7.1	1380/1364	3042/2778	3042/2778	80	0	0	0	
8	L7245/75R17	1211/1185	OWL	248	9.8	800	31.5	12	15.1	7.1	1450/1320	3195/2910	3195/2910	80	0	0	0	
9	L7245/75R17	1211/1185	OWL	272	10.7	854	33.2	12	15.1	8.1	1450/1320	3195/2910	3195/2910	80	0	0	0	
10	L7245/75R14	1231/1205	OWL	267	10.5	804	31.7	12	15.1	7.5J	1550/1400	3415/3085	3415/3085	80	0	0	0	
11	L7285/75R17	1211/1185	OWL	292	11.5	852	33.8	11.3	14.2	8.5J	1450/1320	3195/2910	3195/2910	80	0	0	0	
12	L7285/75R14	1261/1235	OWL	288	11.3	834	32.8	11.3	14.2	8J	1700/1550	3750/3415	3750/3415	80	0	0	0	
13	L7305/70R14	1241/1215	OWL															
14	L7315/75R14	1271/1245	OWL															